

SFS JOEY ALL TITANIUM




Reliable, accurate and efficient, SFS Joey fully titanium heater by Elecro is the ideal choice for a long lasting heater for any application where water contains high TDS, debris laden water and flow rate is reduced. Ideal for commercial pools.



FEATURES


- Various power options ranging from 18-kW to 120-kW
- Easy installation, fully equipped and pre-wired
- Robust, durable construction
- Ultra-reliable flow switch allows safe operation
- Fitted with temperature thermostat and overheating sensor
- Compact, durable design
- Analogue control with 1.2°C differential or digital control with 0.5°C differential and selectable multi-lingual display
- Titanium flow tubes and titanium heating element(s)
- Can be floor or vertically wall mounted
- Vortex, long life, stay clean heating element technology
- 100% efficiency throughout the product life
- Silent operation

TECHNICAL DRAWINGS

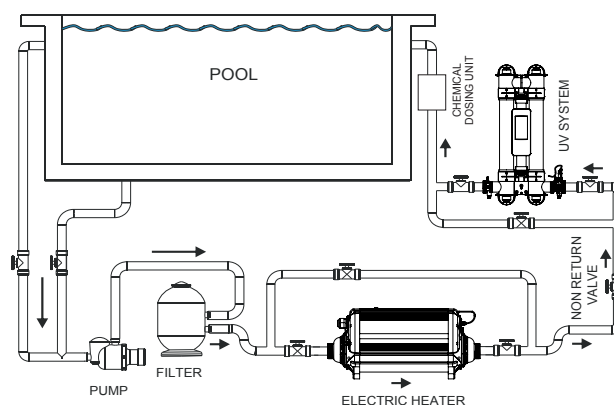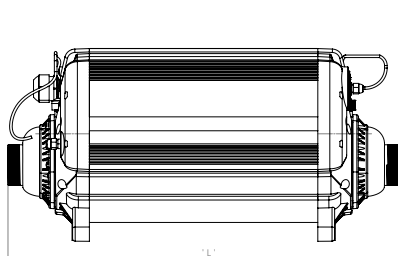


PRESSURE DROP

PRESSURE DROP 3-PHASE 380-415V

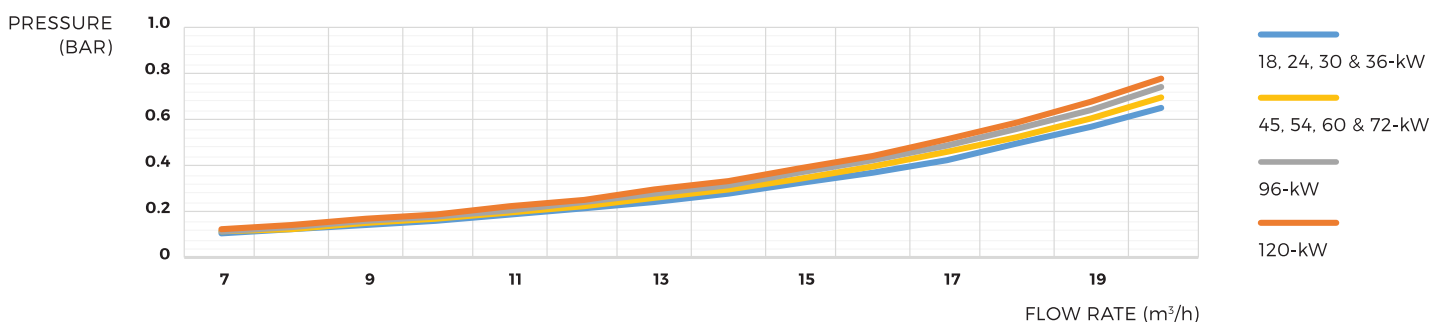

PRESSURE DROP 3-PHASE 220-240V

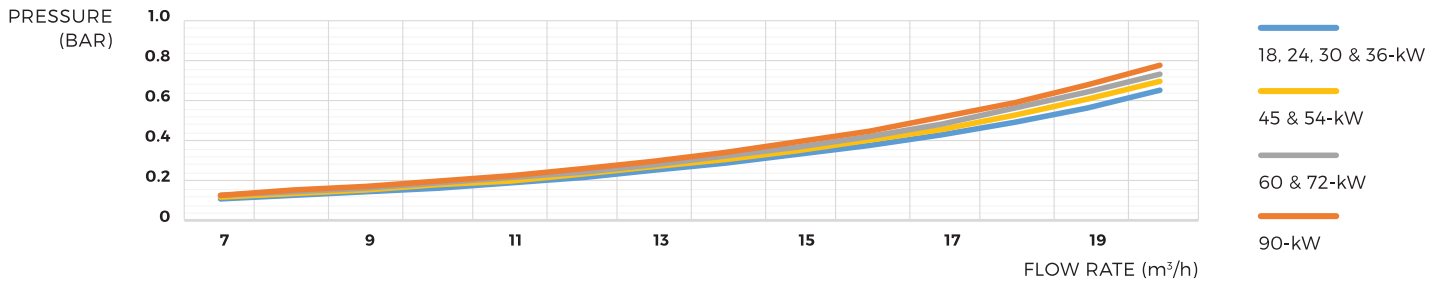

SPECIFICATIONS

POWER SUPPLY	Three phase
FLOW REQUIREMENTS	Minimum flow: 8m³/h Maximum flow: 15m³/h Recommended: 8m³/h
HEATING ELEMENT	Grade 1 titanium
FLOW TUBE	Grade 1 titanium
CONTROL THERMOSTAT	Analogue: 0 > 45°C (1.2°C differential) Digital: 0 > 45°C (0.5°C differential)
SAFETY THERMAL CUT OUT	65°C safety thermal cut out (auto reset) against enclosure over-temperature 60°C safety thermal cut out (manual reset)
FLOW SWITCH	Gold tipped reed switch with titanium fulcrum pin
CONTACTORS	Cascade wired dual Siemens 3RT2023 or 3RT2027 for each element bank
SEALS	High temperature special formula EPDM ferrules
WATER CONNECTIONS	63mm spigot with 2" / 63mm stepped ABS unions
INGRESS PROTECTION RATING	IP44
FREQUENCY	50/60 Hz
WORKING PRESSURE	4 bar maximum
MOUNTING	Floor or wall mounting

MODELS

400V 3-PHASE*	LOAD	PRODUCT CODES		DIMENSION 'L'	NET WEIGHT	GROSS WEIGHT	VOLUME
	Amp	Analogue	Digital	mm	kg	kg	m³
Power Output							
18-kW	26	SFS-18	SFSD-18	699	22.0	26	0.20
24-kW	35	SFS-24	SFSD-24	699	22.0	26	0.20
30-kW	44	SFS-30	SFSD-30	699	22.0	26	0.20
36-kW	53	SFS-36	SFSD-36	699	22.0	26	0.20
45-kW	66	SFS-45	SFSD-45	699	24.0	28	0.20
54-kW	79	SFS-54	SFSD-54	699	24.0	28	0.20
60-kW	87	SFS-60	SFSD-60	699	24.0	28	0.20
72-kW	105	SFS-72	SFSD-72	699	24.0	28	0.20
96-kW	139	SFS-96	SFSD-96	1042	39.5	44	0.28
120-kW	174	SFS-120	SFSD-120	1042	39.5	44	0.28

220-240V 3-PHASE							
18-kW	46	SFS-18-D	SFSD-18-D	699	22.0	26	0.20
24-kW	61	SFS-24-D	SFSD-24-D	699	22.0	26	0.20
30-kW	76	SFS-30-D	SFSD-30-D	699	22.0	26	0.20
36-kW	91	SFS-36-D	SFSD-36-D	699	22.0	26	0.20
45-kW	114	SFS-45-D	SFSD-45-D	699	24.0	28	0.20
54-kW	136	SFS-54-D	SFSD-54-D	699	24.0	28	0.20
60-kW	151	SFS-60-D	SFSD-60-D	1042	39.5	44	0.28
72-kW	181	SFS-72-D	SFSD-72-D	1042	39.5	44	0.28
90-kW	227	SFS-90-D	SFSD-90-D	1042	39.5	44	0.28

* for voltages other than 400V please add: -380 or -415 at the end of a product code e.g.: SFS-36-380
For any other voltages or custom builds, please contact our sales team sales@elecro.co.uk